
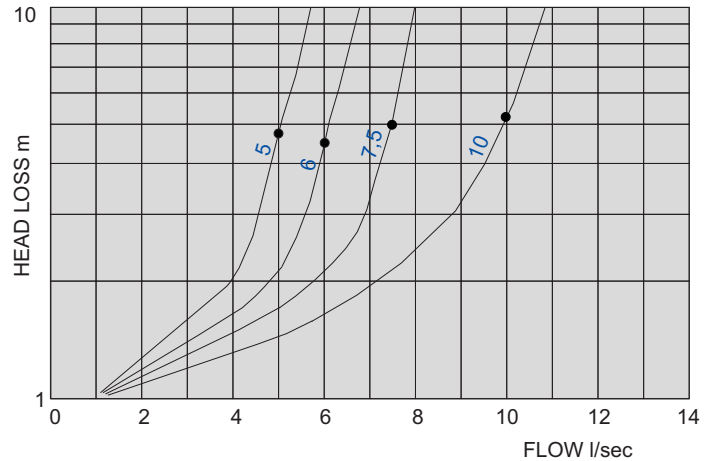


TYPE F for pressure till 5 Bar
 TYPE FH (with hooks) for pressure 10 Bar
 Flow's error 0 till +30 % for flow up to 3 l/s
 Flow's error 0 till +20 % for flow over 3 l/s

Flow limiter reduces the flow rate regardless of flow and pressure fluctuations. Rubber and seat secure a progressively distortion so as to change the flow rate in compliance with network's dynamic pressure.

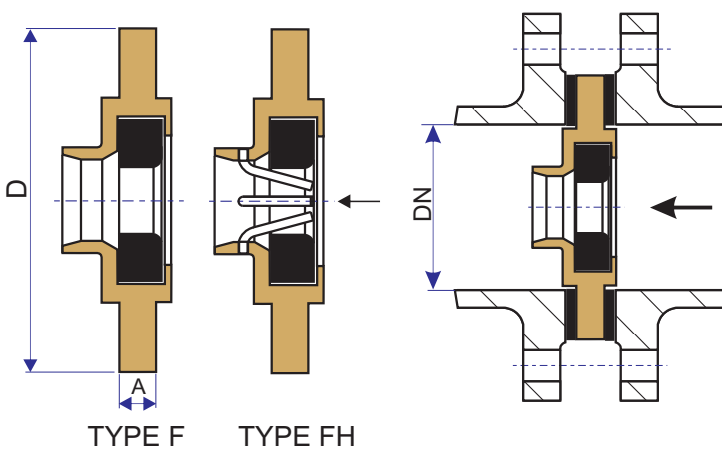

DIMENSIONS (CAST IRON)									
DN	50	60-65	80	100	125	150	200	250	300
A	23(7)	23(7)	23(8)	23(8)	25(8)	25(12)	25(12)	25	25
D	100	110-122	138	158	188	210	268	320	370

mm	FLOW l/sec																			
	1,5	3	4	5	6	7,5	9-10	12	15	20	25	30	35	40	50	60	70	80	100	
50	*	*	*	*																
65		*	*	*	*	*														
80		*	*	*	*	*	*	*												
100		*	*	*	*	*	*	*	*	*										
125				*	*	*	*	*	*	*	*	*								
150					*	*	*	*	*	*	*	*								
200									*	*	*	*	*	*	*	*				
250													*	*	*	*	*	*	*	
300															*	*	*	*	*	*

DESCRIPTION	MATERIAL	NORMS
Body	Cast iron	EN 1561
	Steel	EN 10025
Rubber	EPDM - NBR	EN 681-1
Hooks	Stainless steel AISI 304	EN 1.4301
Coating	Powder epoxy	DIN 30677